


30VA (SY0408-463A1) R-core Power Transformer

1、Diagram

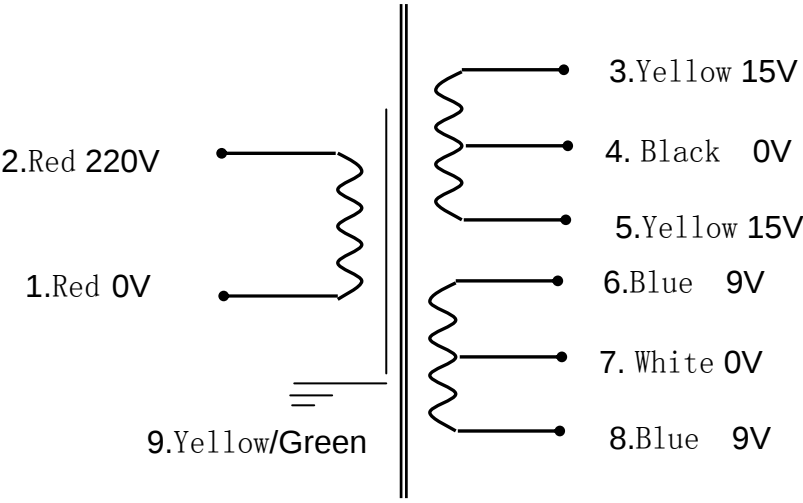

2、Performance

Name	Power	Outside Dimension		Weight	Pitch	Hole
	(VA)	A(mm)	X(mm)	(kg)	(mm)	(mm)
R-core Power Transformer	30	80	41	0.56	54*56	φ 6.5*4
Primary Rate Input			220V 50Hz			
Primary Direct Current Resistance			150Ω			
No-load Current (Max)			10mA			
Secondary Rate Output						
	No-load Voltage (V±5%)		Load Voltage(V±5%)	Rated Load Current (A)		
S1 : 3 ~ 4 ~5	15~0~15		12.6~0~12.6	0.8		
S2 : 6 ~ 7 ~ 8	9~0~9		7.6~0~7.6	0.33		
Lead Wire Specification						
	Color		Specification	Length (mm)		Terminal
Primary Lead Wire : 1~2	Red-Red		UL1672-18#	200		Tin Imbrued 5mm
Secondary Lead Wire : 3~4~5 , 6~7~8	Yellow-Black-Yellow , Blue-White-Blue		UL1672-18#	200		Tin Imbrued 5mm