


2500VA (SY0611-1414A1) Three phases R-core auto transformer

1、Diagram

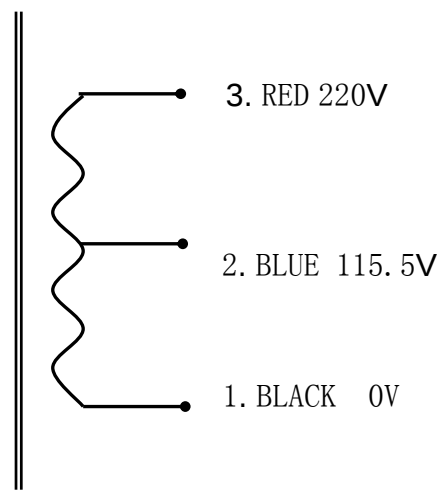

2、Performance

Name	Power	Outside Dimension		Weight	Pitch	Hole
	(VA)	A(mm)	X(mm)	(kg)	(mm)	(mm)
Three phases R-core auto transformer	2500	240	82	11.5	210*156	φ 7
Primary Rate Input			220V 50Hz			
Primary Direct Current Resistance			5 Ω			
No-load Current (Max)			20mA			
Secondary Rate Output						
	No-load Voltage（V±5%）		Load Voltage（V±5%）	Rated Load Current（A）		
S1： 1 ~ 2	0~115.5					
Lead Wire Specification						
	Color		Specification	Length（mm）		Terminal
Primary Lead Wire： 1~3	Black-Red		RV-1.5	500		Tin Imbrued 5mm
Secondary Lead Wire： 1~2	Black-Blue		RV-1.5	500		Tin Imbrued 5mm